

MULTI CONFECTIONER MX110, MX112

Compact & High performance multi-row encrusting machine for confectionery.

Equipped with newly developed "no-damage material transmittal system" and "encruster" in this compact body of less than 2 meters.

Maximum 144,000pcs./h ! (MX112-WD1200, 20rows model)



Furthermore, the distance of the material is minimal so it maintains the natural texture of the product. Casing and filling ratio is freely adjustable and the product weight is easily regulated in keeping the same ratios. With optional devices, mosaic cookies, double filling cookies and twist cookies can be made in addition to regular and single filling cookies.


Wide variety of shapes can be made with many options.

- **Wire Cutter Unit (+Mosaic nozzle)**
The Wire cutter slices the co-extruded cookie dough to a desired thickness. Limitless designs of mosaic nozzles increase the variety of cookies.
- **Double Filling Feeder**
The Double Filling Feeder supplies pastry filling such as cream and jam into filled products, creating double filling products.

The option is mounted on the body of the machine with no extra space required.
Uniquely shaped products can be made with custom nozzles.
- **Ultrasonic Slicer**
The Ultrasonic Slicer cuts the dough sharply and cleanly with the ultrasonic cutter blade without deforming the surface area where it was sliced.
- **Twist Nozzle (+ Vertical Cross Cutter)**
The Twist Nozzle and Vertical Cross Cutter co-extruders two lines of dough with different fillings and produces twist products. *** Number of production row reduces by half.



Two models "MX110 (WD1000mm)" / "MX112 (WD1200mm)" are available for your production needs.

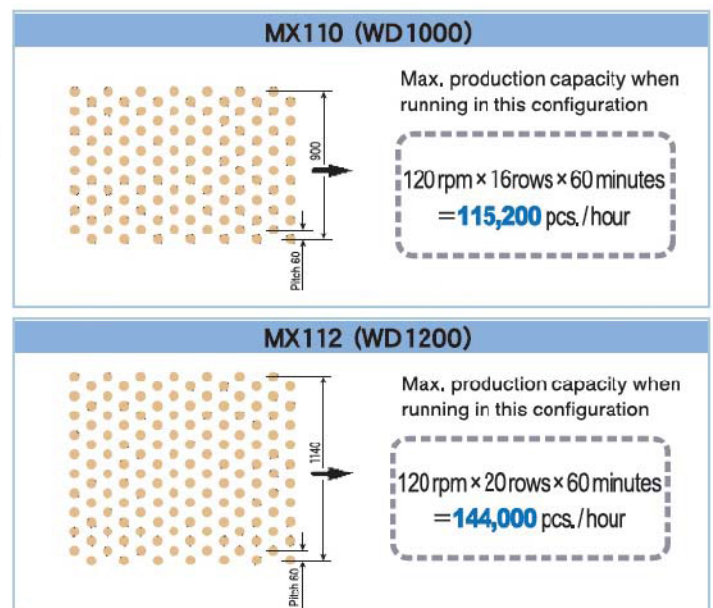

SPECIFICATION

Model Code	MX110 (WD1000,16rows)	MX112 (WD1200,20rows)
Product Width	WD1000	WD1200
Number of Nozzle(Row)	16 nozzles (16rows)	20 nozzles (20rows)
Nozzle Pitch	60mm	60mm
Nozzle Size(Max. Diameter)	35mm	35mm
Product Weight Range	10-25g (Spherical Encrusting)	10-25g (Spherical Encrusting)
Production Capacity	115,200 pcs./H	144,000 pcs./H
Extruding Capacity	3000kg/H	3000kg/H
Hopper Capacity	180 ℓ	217 ℓ

